

AGS2



eCall prepared



Advanced Temperature Management



GPRS Class 10



Quad-Band



HQ Voice Support VDA 2a



Antenna Diagnostics



Voice Prompts




RLS Monitoring



SSL Encryption



Generic Flash Access

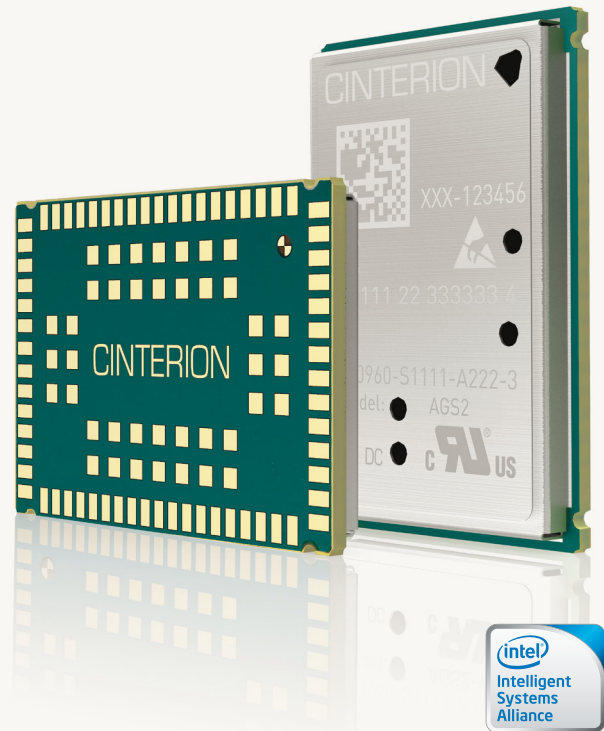

2G

Cinterion® AGS2 Wireless Module

Advanced 2G Automotive Grade Wireless at its Best

Cinterion® AGS2 Wireless Module

Advanced 2G Automotive Grade Wireless at its Best

The Cinterion AGS2 wireless module is another in a long history of successful automotive grade products, offering an ultra compact LGA footprint with a compelling set of features for 2G networks.


The ruggedized AGS2 is engineered to meet the highest level of compliance with automotive specifications and provides an unparalleled level of quality and performance, even under the harshest operating conditions.

Based on the latest generation of Intel's Quad-Band GSM/GPRS baseband chipset, the Cinterion AGS2 module incorporates best in class low power consumption and ensures long-term availability. AGS2 is prepared to meet the comprehensive requirements of the European eCall initiative.

It also features in-band modem functionality such as voice prompts, VDA 6.2 audio quality, jamming detection, antenna diagnosis as well as advanced SSL encryption to support IP-based services.

The AGS2 is an ideal enabler for automotive and ITS applications such as toll collect, onboard vehicle telematics and fleet management as well as emergency call, breakdown support or roadside assistance.

Advanced 2G Automotive Grade Wireless at its Best



LGA technology

Land grid array, or LGA, is a surface-mount technology for fully automated manufacturing allowing to benefit from efficiency and process consistency. Cinterion's unique type of LGA technology is designed with focus on highest reliability and flexibility and to meet the demanding requirements of M2M application manufacturers.

Generic Flash Access

The Cinterion AGS2 module provides the application processor with generic access to the internal memory of the module, allowing it to be used either for voice prompt files common to eCall applications or to download application software for upgrade processes.

Automotive Compliance

The AGS2 is compliant with multiple automotive manufacturing process standards according to TS16949 and quality processes including APQP, PPAP, PCN, and 8D.

Gemalto M2M Support includes:

- > Personal design-in consulting for hardware and software
- > Extensive RF test capabilities
- > GCF/PTCRB conform pretests to validate approval readiness
- > Regular training workshops



Local engineers, a competent helpdesk, a dedicated team of R&D specialists and an advanced development center are the hallmarks of our leading support offer.

Cinterion® AGS2 Features

GENERAL FEATURES

- > GSM Quad-Band: 850 / 900 / 1800 / 1900 MHz
- > 3GPP release 99
- > GPRS multi-slot Class 10
- > Compliant to GSM phase 2/2+
- > Output power:
 - > Class 4 (2W) for 850 / 900
 - > Class 1 (1W) for 1800 / 1900
- > SIM Application Toolkit Class 3, letter Class B and C, Release 99
- > Control via AT commands (Hayes, 3GPP TS 27.007 and 27.005)
- > Internet Services TCP server/client, UDP, HTTP, FTP, SMTP, POP3, Ping
- > Secure Connection with TLS
- > DTMF detector
- > Supply voltage range 3.3 to 4.5 V
- > LGA66 soldering mount, MSL4
- > Dimensions: 27.6 × 18.8 × 2.7 mm
- > Operating temperature: -40 °C to +90 °C
- > RoHS and EuP compliant

SPECIFICATIONS

- > GPRS Class 10
 - DL: max. 85.6 kbps,
 - UL: max. 42.8 kbps
 - Mobile Station Class B
- > CSD data transmission up to 14.4 kbps, V.110, non-transparent
- > USSD support
- > SMS text and PDU mode, cell broadcast
- > Fax Group 3, Class 1 and Class 2
- > High quality voice support for headset, headset and hands free (double talk) operation, VDA 2a
- > FR, HR, EFR and AMR speech codec support
- > Integrated TTY modem

SPECIAL FEATURES

- > Prepared for EU eCall compatible
- > RIL driver for Android™ based devices
- > RIL driver for Windows Mobile™ based applications
- > In-band Modem Release 10.0.0
- > Voice prompts
- > Antenna diagnostic
- > Firmware update via serial interface
- > Radio Link Stability Monitoring
- > Real time clock with alarm functionality
- > Customer Flash Storage / Generic flash access

INTERFACES (LGA PADS)

- > Power supply
- > Audio analog & digital interface
- > Serial interface 1.8 V, including automatic baud rate detection
- > ICC/UICC card interface 1.8 V and 3.0 V supporting SIM
- > 6 GPIO pins 1.8 V (special option for PWM or Buzzer and status indication functionality, 2 GPIO usable for I²C)
- > fast shut down
- > ADC interface

APPROVALS

- > CE, R&TTE, GCF, FCC, PTCRB, UL, IC, E-Mark
- > GCF Listing
- > Other local approvals and network operator certifications

For more information, please visit

gemalto.com/m2m, www.facebook.com/gemalto, or Follow @gemaltom2m on twitter.

The information provided in this brochure contains merely general descriptions or characteristics of performance, which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of Cinterion Wireless Modules GmbH or supplier companies whose use by third parties for their own purposes could violate the rights of the owners. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners. ARM9 is a registered trademark of ARM Limited.

**Cinterion Wireless Modules GmbH,
a Gemalto Company**

St.-Martin-Str. 60

81541 Munich

Germany



➔ GEMALTO.COM/M2M

gemalto
security to be free